



Nocturn HD-SDI



Features

- Color or Monochrome
- Night time broadcasting
- Remote sensing
- Vehicle dashboard camera
- Security or Surveillance
- Unmanned ground or aerial


Camera	Specifications
Resolution	1280 x 720 Pixels
Pixel Pitch	9.7 μm x 9.7 μm
Shutter Mode	Rolling
Spectral range	Monochrome 350-1100nm Smart Color 350-650nm
Read Noise	< 4e- median at 60 Hz
Frame Rate	50 Hz or 60 Hz
Sensitivity	Full daylight to bright starlight conditions

Imaging enhancements	
Non-uniformity correction	Factory calibrated
Image processing	Noise removal, sharpening, contrast enhancement
Gain and exposure controls	Fully automatic or manual
Digital Zoom	4x


Camera format and dimensions	
Optical format	1 inch
Lens mount	C-mount
Mounting interface	1/4-20" tripod mount adapter
Dimensions	35mm x 37mm x 54mm
Weight	< 95g

Quantum Efficiency

Monochrome

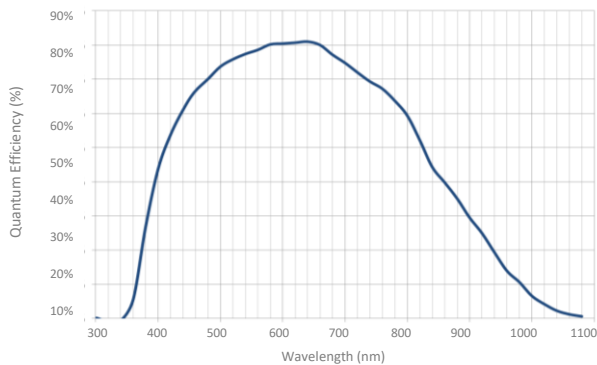

Color

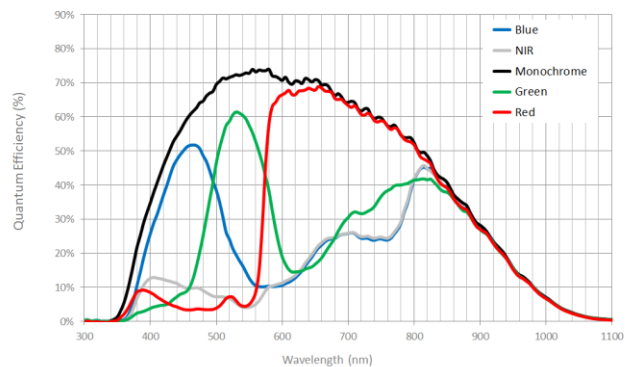

Contact us at digitalvision@photonis.com



PHOTONIS
Digital Vision


The Information provided in this document is believed to be accurate and reliable but it is not guaranteed as such and is subject to change without notice. No liability is assumed for its use. Performance data represents typical characteristics as individual product performance may vary. Customers should ensure that they have up-to-date Photonis product information before placing orders. Text and pictures are not contractually binding. Photonis makes no representations or warranties as to the application of Photonis products. This document may not be reproduced, in whole or in part without the prior written consent of Photonis.



Input/Output	
Digital Video Output	HD-SDI 720p 60Hz or 50Hz
Communications	Serial over USB or TS-422

Environmental and Power	
Operating Temperature	-40°C to +60°C
Storage Temperature	-50°C to +80°C
Input Voltage	+5 to +12 VDC over GPIO Interface
Power dissipation	Monochrome < 2W (Typical) Smart Color < 2,5W (Typical)


Mechanical Dimensions for HD-SDI Camera Body (in mm)

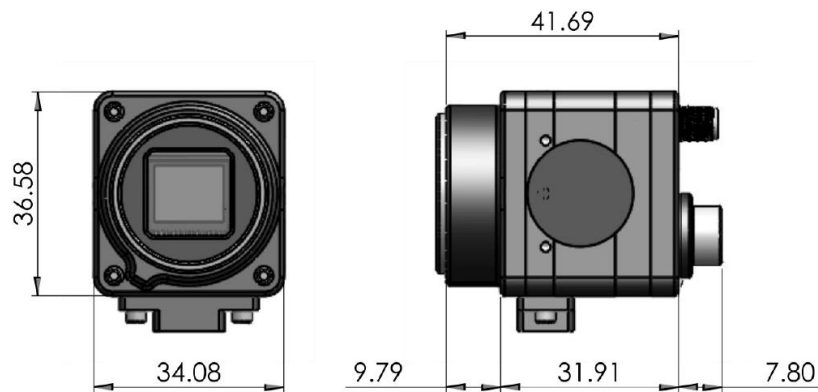

Nocturn HD-SDI Camera is powered by the Kameleon Color CMOS imaging sensor, or the Lynx CMOS monochrome sensor, both optimized for low light level imaging.

These fully solid-state CMOS sensors provide excellent imaging across varying light conditions, from daylight to low-light levels such as those found during a quarter moon.

Both Lynx and Kameleon CMOS imaging sensors provide full SXGA resolution at 60 frames per second, with < 4e- read out noise and without cooling.

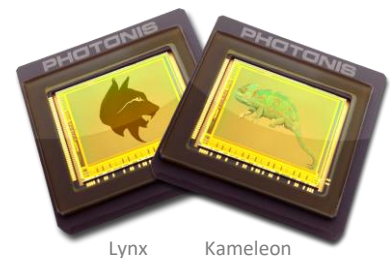

Lynx

Kameleon

Contact us at
digitalvision@photonis.com



PHOTONIS
Digital Vision

The information provided in this document is believed to be accurate and reliable but it is not guaranteed as such and is subject to change without notice. No liability is assumed for its use. Performance data represents typical characteristics as individual product performance may vary. Customers should ensure that they have up-to-date Photonis product information before placing orders. Text and pictures are not contractually binding. Photonis makes no representations or warranties as to the application of Photonis products. This document may not be reproduced, in whole or in part without the prior written consent of Photonis.